

EDGY MODS

CLS 2011 – 2017 & E 2010 - 2016 Class Instructions

Make sure the key is out of the ignition and no power is on.

Spray a little WD40 or similar lubricant on the factory Link ends before removal.

Front:

1. Jack up the front and locate the stock ride height sensor & Links. They're located towards the front of the vehicle on the lower control arms.
2. Remove the stock Links by using a small set of vice grips. Squeeze them on the Link close to the control arm end. Twist gently and it will pop off. Once 1 side is off the other comes off easily by bending it backwards. Still be gentle enough to not break the sensor arm.
3. **Shortening the Link from the factory length will lower the vehicle.** Each 5mm shorter than stock will lower approx. $\frac{3}{4}$ - 1 inch. Set the new Adjustable Links so they are equal in length.
4. Install Adjustable Links with long end down.

Rear:

1. Jack up the rear and locate the stock ride height sensor Links. They're connected to the upper control arms.
2. Remove it by sliding an adjustable wrench over the arm and twisting it the same way. A 9mm wrench will also work.
3. **Shortening the Link from the factory length will lower the vehicle.** Each 5mm shorter than stock will lower approx. $\frac{3}{4}$ - 1 inch. Set the new Adjustable Links so they are equal in length.
4. Install with long end up.

Start the vehicle, raise it up and down and move it forward and back to get the suspension active to the new settings. If you are not happy with the height you can easily re-adjust each Link. Just remove 1 side and give it a few turns. Usually 2 turns is about a $\frac{1}{4}$ inch in height.

Depending how low you make the vehicle a wheel alignment may be required to reduce tire wear.


Be a part of Edgy Mods. Go to the Gallery section and add your pictures.

Thank you for the purchase. If you have any questions please don't hesitate to ask any time via phone or Email.

John Vranic

www.edgymods.com

604-780-7734

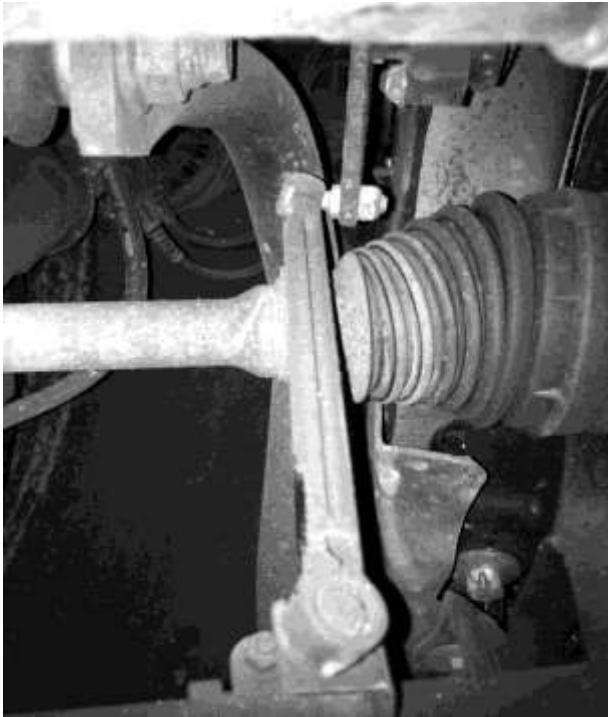

Front Stock Link



Front Adjustable Link



Rear Stock Link



Rear Adjustable Link