

EDGY MODS

Jeep Cherokee 2016 – 2021 Lift Instructions

Make sure no power is on.

Spray a little WD40 or similar lubricant on the factory Link ends before removal.

Front:

1. Jack up each corner and locate the stock ride height sensor Link straight inside the wheel well above the tire.
2. Remove the stock Link by using a wide flat head screwdriver or panel popper. Flip the end part of the Link that is connected to the control arm side. Once one side is off, bend it backwards against the sensor arm. Be careful not to break it.
3. **Shortening the Link from the factory length will lift the vehicle and measure eye to eye.**
Each 5mm shorter than stock will lift approx. $\frac{3}{4}$ - 1 inch. Set the new Adjustable Links so that they are equal in length.
4. Install Adjustable Links with long end up.

Rear:

1. Jack up the rear and locate the stock ride height sensor Links. They are connected to the lower control arms.
2. Remove it the same way as the front.
3. **Lengthening the Link from the factory length will lift the vehicle and measure eye to eye.**
Each 5mm longer than stock will lift approx. $\frac{3}{4}$ - 1 inch. Set the new Adjustable Links so that they are equal in length.
4. Install with long end up.

Start the vehicle, raise it up and down and move it forward and back to get the suspension active to the new settings. If you are not happy with the height you can easily re-adjust each Link. Just remove 1 side and give it a few turns. Usually, 2 turns is about a $\frac{1}{4}$ inch in height.

Depending how high you make the vehicle a wheel alignment may be required to reduce tire wear.

Always looking to add more photos to our gallery. Submit yours by email or text.

Thank you for the purchase. If you have any questions, please don't hesitate to ask any time via phone or Email.

John Vranic

www.edgymods.com

604-780-7734




Front Stock Link



Adjustable Link Installed



Rear Stock Link

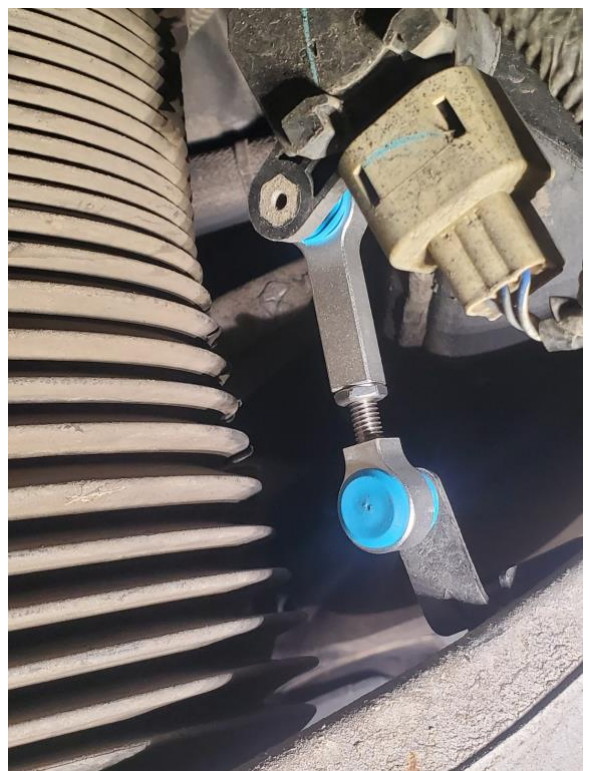

Adjustable Link Installed